

LAX

Specialty Wet Vacuum Cleaner



**NO
RESIDUAL
LIQUID**

**COLLECTION & DEHYDRATION
OF SLUDGE IN COOLANT!**

Bags and dries
sludge for clean and
convenient disposal

CLEAN

Easy operation
with simple and
compact design

QUICK


Remove both Sediment
and floating sludge
in same process

EASY TO USE

HIGHLIGHTS

- Special air-liquid handling pump capable of filtering both sediment and floating sludge.
- Compact and portable design to easily filter various machines and locations.
- Bag filter for convenient handling and disposal.
- Collected sludge can be dehydrated and industrial waste cost and amount of coolant can be reduced.

FLOWCHART

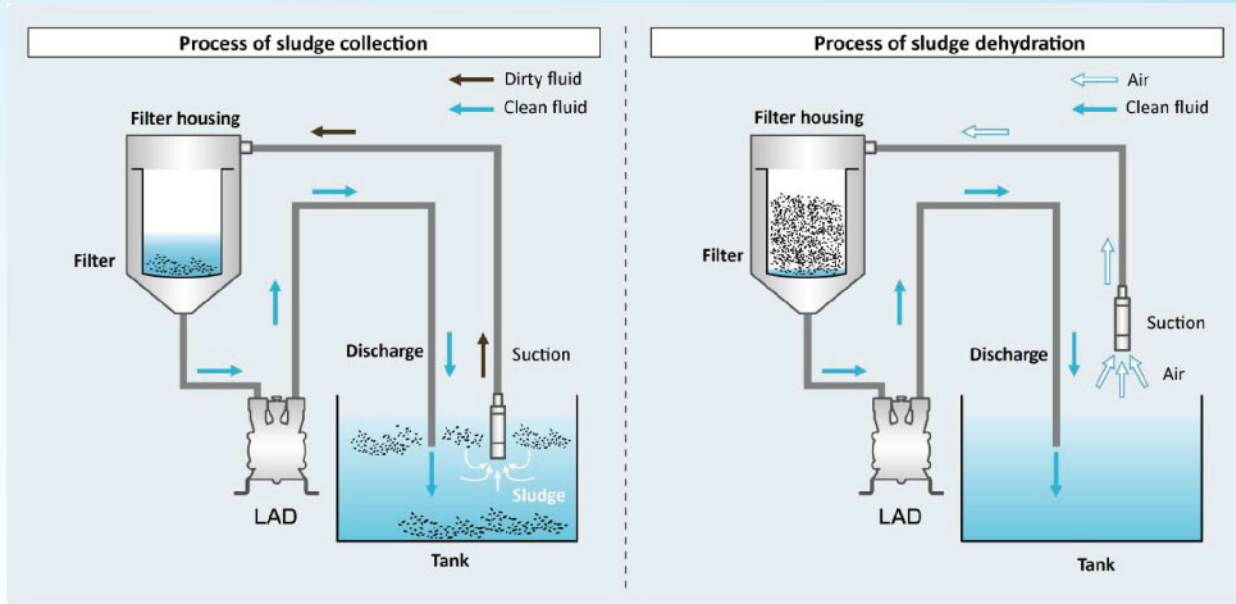

Tank Filtration



Grinded aluminum sludge after dehydration



Grinded bearing steel sludge after dehydration

* State of sludge after dehydration depends on sludge and liquid type.

SPECIFICATION



Flow rate	Max. 30L/min
Power	AC 100~115V x 0.4kW x 8.0~9.8A AC 200~230V x 0.4kW x 4.0~4.9A
Dimensions	350 x 710 x 910 mm
Weight	45Kg (Approx.)
Filter Options	20, 40, 100um

Mass Global Trading

Plot No. 3/7, U-Block, DLF Phase - III, Gurgaon - 122002, INDIA. Phone : +91 - 124 - 4067774,
Mobile : +91 - 9911013300, Fax : +91 - 124 - 00000000, email : info@massglobaltrading.com